



江苏帝翔塑机科技有限公司

Jiangsu Kingshine Plastic Machine Co.,Ltd.

地址:江苏省无锡市新吴区新友北路102号

Add: No.102 North Xinyou Rd, Xinwu District, Wuxi, Jiangsu, China

Contact: +86137 7112 5771 (刘光辉)

+8613814297981 (Jay Ma Export)

Email: ceo@kingshineplast.com

<http://www.kingshineplast.com>

<http://www.kingshinechina.com>

JIANGSU

KINGSHINE PLASTIC MACHINE

专业生产PVC片板材挤出机
Specialize In PVC Sheet Board Extruder



设备规格及标准若有变动, 恕不另行通知
Equipment specifications and standards are subject to change without prior notice.

江苏帝翔塑机科技有限公司
Jiangsu Kingshine Plastic Machine Co.,Ltd.



About Us 关于我们

江苏帝翔塑机科技有限公司位于无锡，公司专业生产制造高端塑料挤出设备。我司专注于SPC/LVT 地板生产线，PVC片材生产线，PVC发泡板生产线，PVC门板/门框生产线的生产与研发。帝翔团队，根据客户现场的持续反馈并不断吸收欧洲先进技术，成功研发了SPC地板同步对花的专利技术，实现高精度的在线同步对花效果。

帝翔设备远销欧洲、中东、非洲和东南亚等国家地区，深得国内外客户得信誉和好评。

Jiangsu Kingshine Plastic Machine is located in Wuxi, our company specializes in manufacturing high-end PVC plastic extrusion equipment. Our company specializes in the research and development of SPC/LVT flooring production line, PVC laminate production line, PVC foam board production line, PVC door board / door frame production line. Kingshine team, according Kingshine team, based on the continuous feedback from the customer site and constantly absorbing advanced European technology, successfully developed our patented technology of EIR SPC floor and achieve the high-precision online EIR effect.

Kingshine equipment exported to Europe, the Middle East, Africa and Southeast Asia and other countries and regions, enjoying the reputation and praise of customers at home and abroad.

公司主要产品有系列塑料机械：

1. SPC/LVT地板生产线
2. PVC木塑发泡板生产线
3. PVC片材/仿大理石生产线
4. PVC门框/型材生产线
5. PVC木塑墙板/门板生产线
6. PE/WPC木塑型材生产线
7. 混料机/破碎机/磨粉机/UV机/覆膜机

Our Main Supply as below:

1. SPC/LVT Flooring Production Line
2. PVC/WPC Foam Board Production Line
3. PVC Laminating Sheet/Marble Sheet Production Line
4. PVC Door Frame/Profile Production Line
5. PVC WPC Wall Panel/Door Panel Production Line
6. PE/WPC Profile Production line
7. Mixer/Crusher/Miller/UV Coating machine/ Lamination and hot stamping machine

Advance of Kingshine Plastic Machine:

1. 100% Germany Siemens PLC Control
2. All international brand of electric parts (Schneider , Orman , Siemens , ABB..)
3. Turnkey project from factory design till finished product
4. 24hr after sale service
5. Strong production and after sale service team

我司提供整线交钥匙工程，根据客户项目要求，有资深专家为客户提供全方位的服务。

公司紧盯国际高新技术，不断吸收和储备，不断完善并自主创新，尽心尽责，求实创新，想客户所想是本公司一贯的准则，客户经理将细心地与你进行着沟通，全心全意的为你提供着合适的产品发展计划，同时为您提供体贴入微的售前，售中和售后服务，让您不仅得到具有竞争力的产品，同时感受到帝翔人带给您的优质服务理念。

“诚信、严谨、卓越、奉献”是企业一贯坚持的宗旨，也是企业文化之体现。我们坚信博大的精神文化和不断的创新是企业持久和跨越式发展的根本。

Our company provides the whole line turnkey project, according to customer project requirements, there are senior experts to provide customers with a full range of services.

Kingshine focuses on international high and new technology, constantly absorbing and reserving, improving and innovating. Thinking what customer is thinking is the company's consistent guidelines, the sales manager will always communicate with you, wholeheartedly to provide you with the right product development plan, while providing you with considerate pre-sale, sales and after-sales service. Let you not only get competitive products, but also feel the quality of service brought to you by the team of Kingshine.

"Integrity, preciseness, excellence, dedication" is the enterprise always adhere to the purpose, but also the embodiment of corporate culture. We firmly believe that the broad spiritual culture and continuous innovation is the root of the enterprise lasting and leapfrog development.





企业文化 Company Culture

质量成就品牌, 诚信铸就未来
Quality makes the brand, and integrity
creates the future



经营理念 Business Philosophy

1. 坚信一个希望
 2. 坚持一种态度
 3. 保证一流质量
 4. 保持一级信誉
1. Carry forward the combatant spirit
 2. Hold the optimistic attitude
 3. Ensure first-class quality
 4. Maintain credibility on the level





服务宗旨 Service Purposes

1. 热情接待新老客户, 确切了解顾客需求
 2. 严格质量过程控制, 确保合同交货周期
 3. 及时进行质量跟踪
1. Warmly welcome new and old customers and understand what they need
 2. Controlling quality process strictly to ensure products delivery in the cycle of the contract
 3. Doing quality tracking in time

Content 产品目录

SPC地板生产线 (同步对花技术) SPC Floor Production Line (Online EIR)	P.05
LVT地板生产线 LVT Flooring Production Line	P.07
PVC大理石 (压纹) / 片材生产线 PVC Marble (Embossing)/Laminate Sheet Production Line	P.09
WPC地板生产线 WPC Flooring Production Line	P.11
PVC外墙挂板生产线 PVC Soffit Panel Production Line	P.12
PVC/WPC 发泡板生产线 PVC/WPC Foam Board Production Line	P.13
PVC 自由发泡片材生产线 PVC Free Foam Sheet Production Line	P.14
木塑门板生产线 PVC/WPC Door Board Production Line	P.15
木塑门框生产线 PVC/WPC Door Frame Production Line	P.16
木塑PE/PP, WPC户外型材生产线 PE/PP WPC Outdoor Profile Production Line	P.17
PVC/WPC 型材生产线 PVC/WPC Profile Production Line	P.19
塑料辅机 Plastic Auxiliary Machinery	P.20
帝翔项目案例 Kingshine Project Cases	P.22

SPC地板生产线(同步对花技术) SPC Floor Production Line (Online EIR)

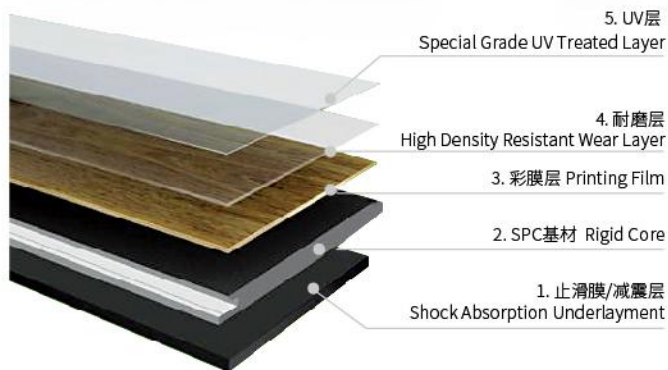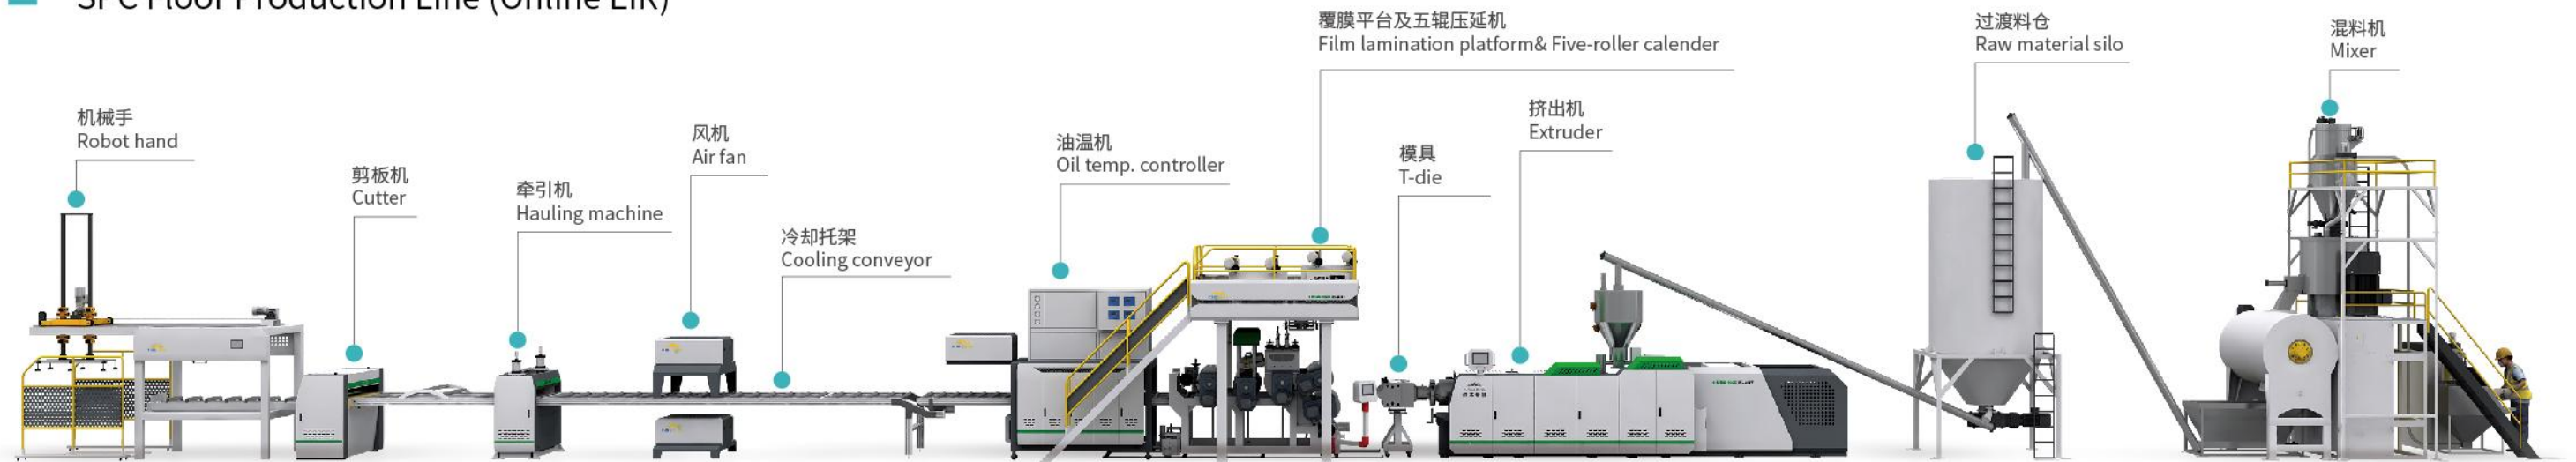

- SPC地板特性**
SPC Floor Main Features
- 防火 Fire-Proof
 - 防水 Water-Proof
 - 环保 VOC-Free
 - 高强度 High Strength
 - 零收缩 Zero Shrinkage
 - 防滑 Anti-slipping
 - 静音 Sound-Proof
 - 抗菌 Anti-Bacterial
 - 安装方便 Easy Installation

产品说明 Product Description

公司最新推出高产能超级锥双 SPC 地板生产线，并搭载在线同步对花技术，相较于普通锥双 SPC 地板生产线具有以下优势：

1. 更高产量。高产能超级锥双 SPC 地板生产线每日产量可达 60 吨；
2. 更低能耗，单位产量能耗是普通锥双设备的 70%；
3. 螺杆使用寿命长，是普通锥双螺杆的 2 倍；
4. 公司特殊的五辊压延机，提高生产速度，增强 SPC 地板中彩膜与耐磨层的剥离强度，压纹更逼真；
5. 配套帝翔在线同步对花专利技术，实现高精度高自动化同步对花。



SPC地板生产工艺 Production Steps





Kingshine developed the High Capacity Super Conical SPC Floor Production Line with online EIR technology, which has the following advantages compared with the traditional conical twin screw SPC floor production line:

1. The output is larger, with a daily output of 60 tons.
2. Lower energy consumption, energy consumption per unit output is 70% of traditional conical twin screw extrusion.
3. The screw has a long service life, which is twice the service life of the traditional conical twin screw.
4. Kingshine special five-roller calender improves the peeling strength of SPC floor, making the embossing more realistic.
5. The online EIR technology with high accuracy and automation.

技术参数 Technical Parameters

设备参数 Model	锥双 110 Conical 110	锥双 115 Conical 115	锥双 130 Conical 130
制品厚度 Thickness (mm)	2-8	2-8	2-8
模具宽度 T-die width (mm)	1050, 1350	1050, 1350	1050, 1350
主机功率 Extruder motor (kw)	200	200	280
产量 Capacity (Ton/24hrs)	30	40	60

■ LVT地板生产线 LVT Flooring Production Line

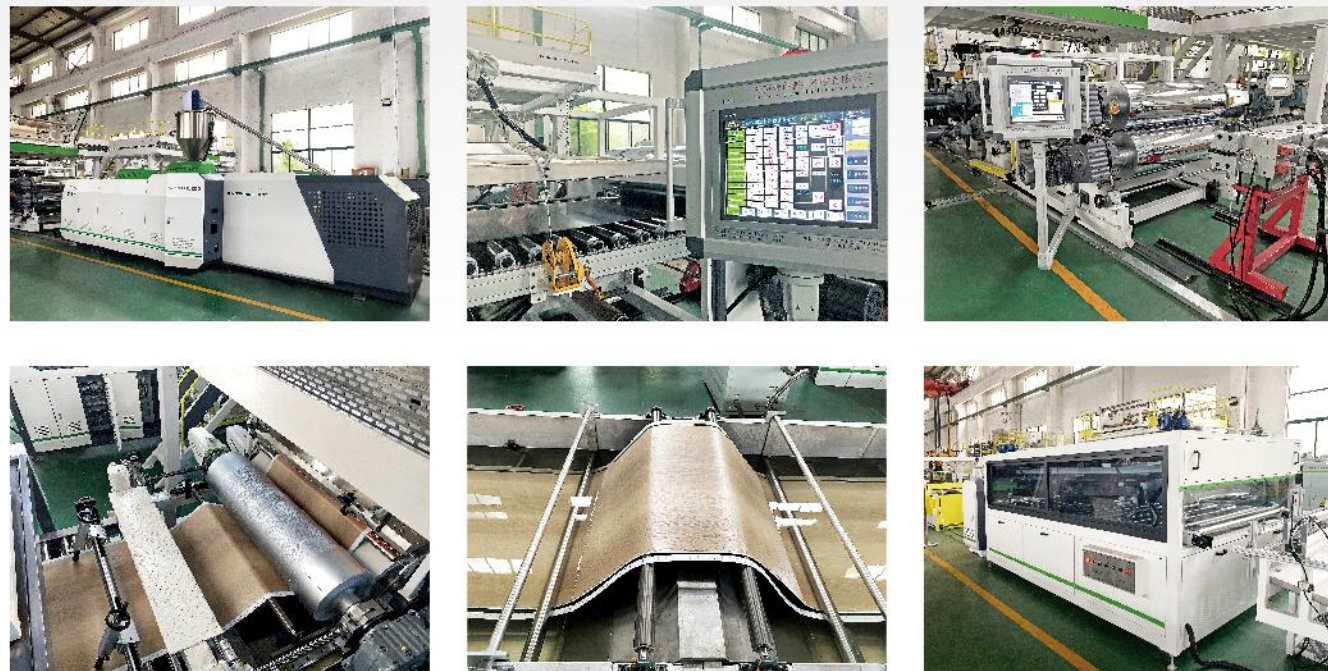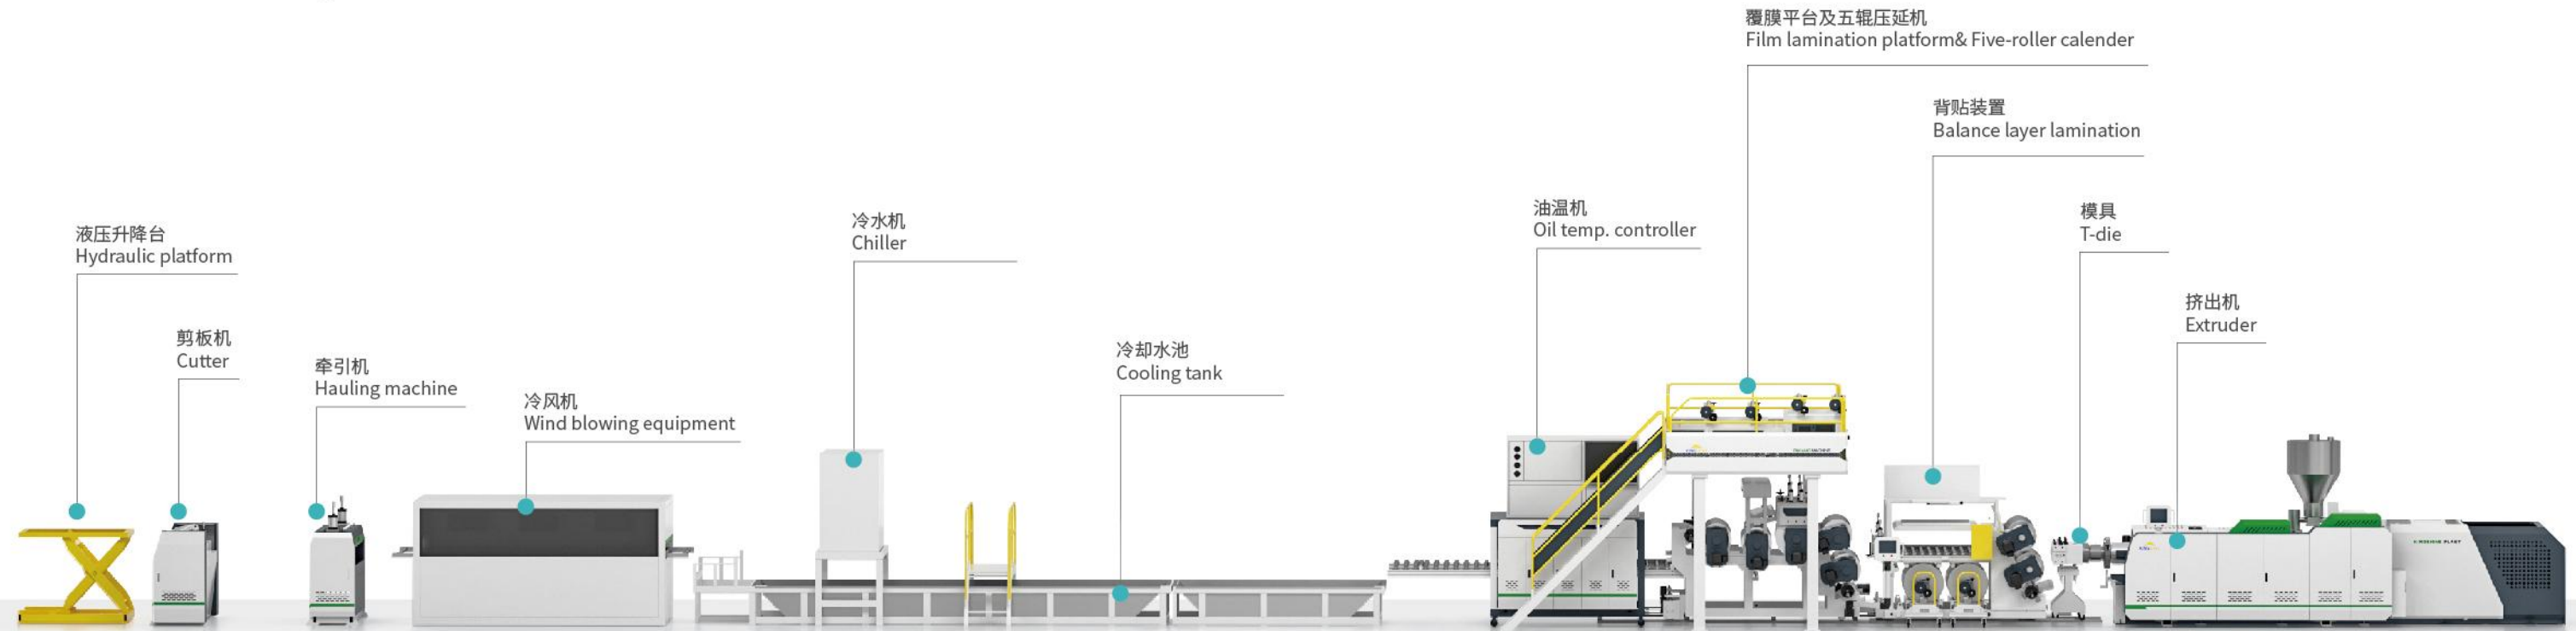

设备特点 Equipment Features



- 1、高产能，日产能达 30 吨 /24 小时以上。线速度达 6~10 米 / 分钟。
- 2、背贴装置，在 LVT 底层覆平衡层，解决 LVT 地板翘曲问题。
- 3、所生产 LVT 产品符合欧洲 TUV 认证。
- 4、可搭配帝翔专利在线同步对花系统生产同步对花 LVT 产品。
- 5、设备采用国际尖端品牌配置：ABB 变频器，西门子电机，西门子 PLC，原装施耐德电气，伺服剪板机，自动化程度精度高。

1. High production capacity, with a daily output over 30 tons/24 hours. The linear speed reaches 6~10 m/min.
2. Machine with balance layer lamination equipment. Laminating the balance layer on the LVT bottom layer to solve the problem of LVT floor warping.
3. The LVT flooring from this production line meet the European TUV certification.
4. Kingshine patent online EIR system is optional to use in this line. With online EIR system can make high-end EIR LVT floor products.
5. The equipment adopts international top brand configuration: ABB frequency converter, Siemens motor, Siemens PLC, original Schneider Electric, servo cutter, etc. It is high accuracy and automation.

技术参数 Technical Parameters

设备参数 Model	92/188	110/220
制品厚度 Thickness (mm)	1-3	1-3
模具宽度 T-die width (mm)	1050/1350	1050/1350
主机功率 Extruder motor (kw)	110	200
产量 Capacity (Ton/24hrs)	15	30-40

■ PVC大理石(压纹)/片材生产线 PVC Marble (Embossing)/Laminate Sheet Production Line

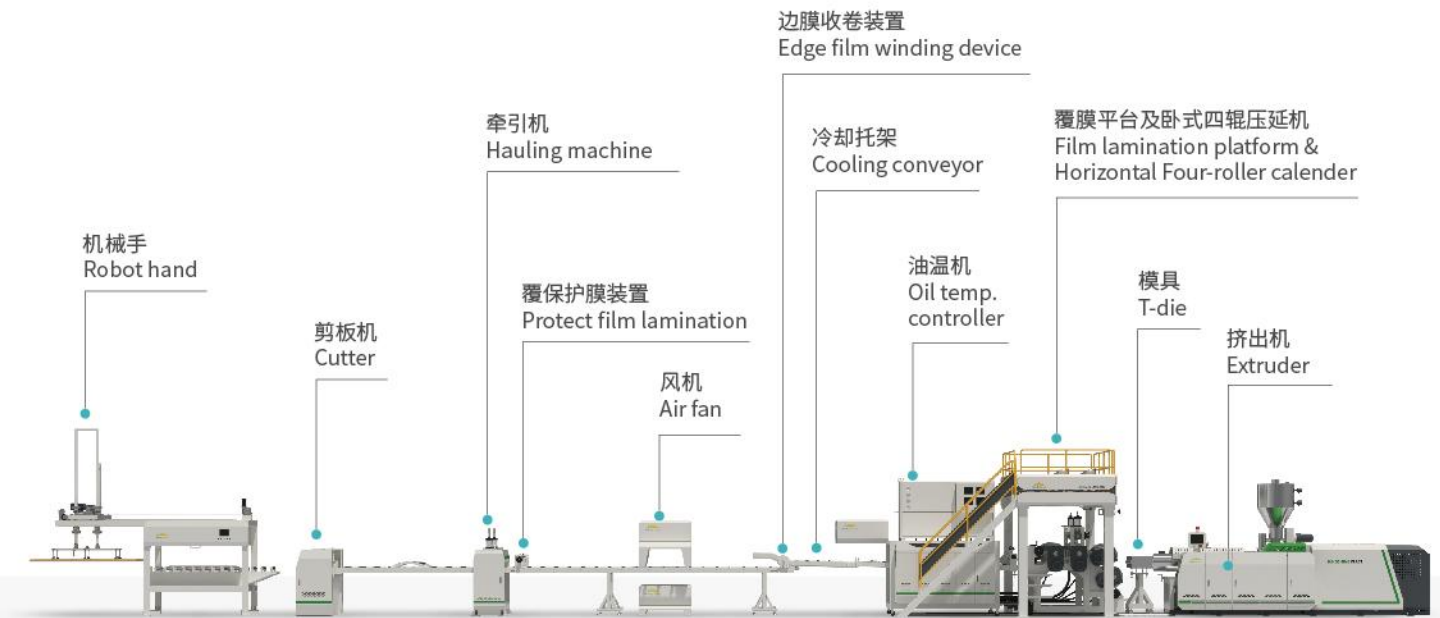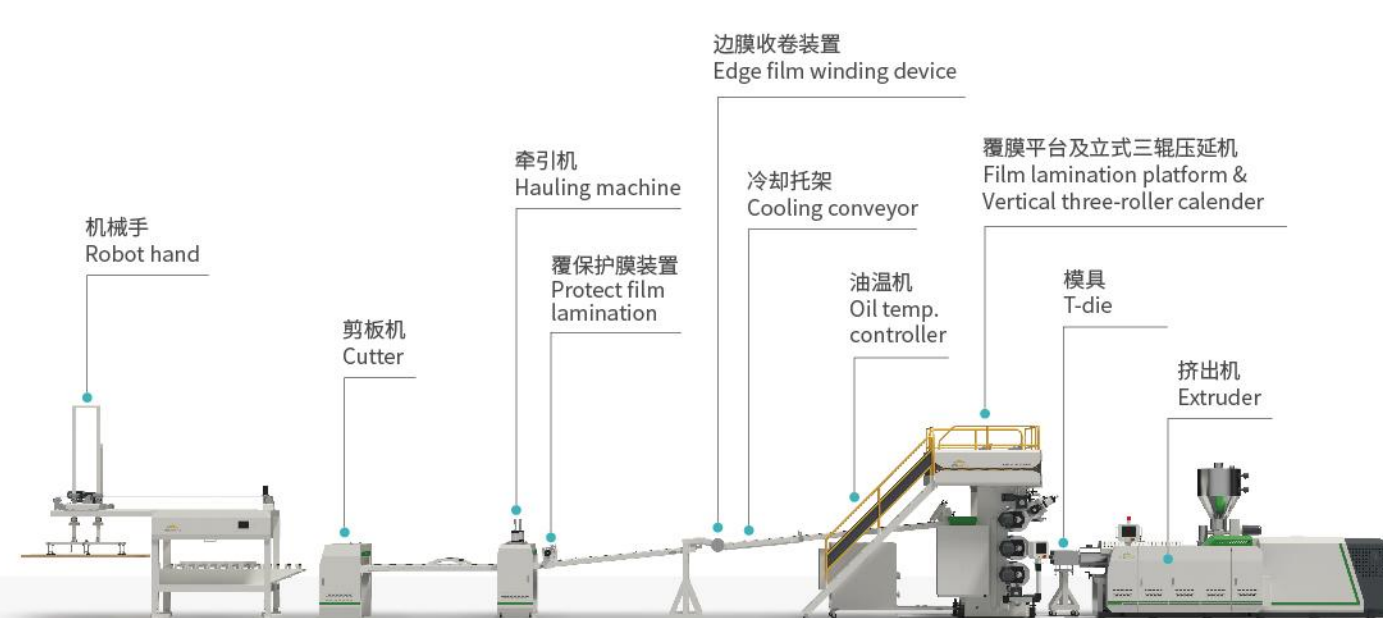

生产线组成: 锥形双螺杆挤出机、模具、立式三辊压延机（含在线覆膜设备）、冷却导辊、牵引裁边装置、剪切机、抬板机组成。卧式四辊压延机特别为表面压纹产品开发，可通过更换压纹辊定制不同纹路，换辊方便。

适用范围: 广泛用于各种豪华建筑如宾馆、酒店、商务大厦、酒吧、咖啡厅以及家庭等。属于高档华丽装饰新材料。

性能特点: 无毒、无放射性、B级防火、不沾油、不渗污、抗霉抗菌、耐磨耐冲击、易保养、拼接无缝、任意造型。



技术参数 Technical Parameters

设备参数 Model	80/156	92/188
制品厚度 Thickness (mm)	1-8	1-8
模具宽度 T-die width (mm)	1350	1350
主机功率 Extruder Motor (kw)	75	110
产量 Capacity (Ton/24hrs)	10	15


Composition of the production line: Conical twin - screw extruder, T-die, vertical three - roller calender (including online laminating), cooling rollers, traction and edge - trimming device, shearing machine, sheet - lifting machine. The horizontal four - roll calender is specially developed for surface embossed products. Different patterns can be customized by replacing the embossing rollers, and the roller replacement is convenient.

Scope of application: widely used in various luxury buildings such as hotels, business buildings, bars, cafes and families. It belongs to high-grade gorgeous decoration new material.

Performance characteristics: non-toxic, non-radioactive, class B fire prevention, non-oil, non-infiltration, anti-mildew and anti-bacteria, wear and impact resistance, easy maintenance, seamless splicing, arbitrary shape.

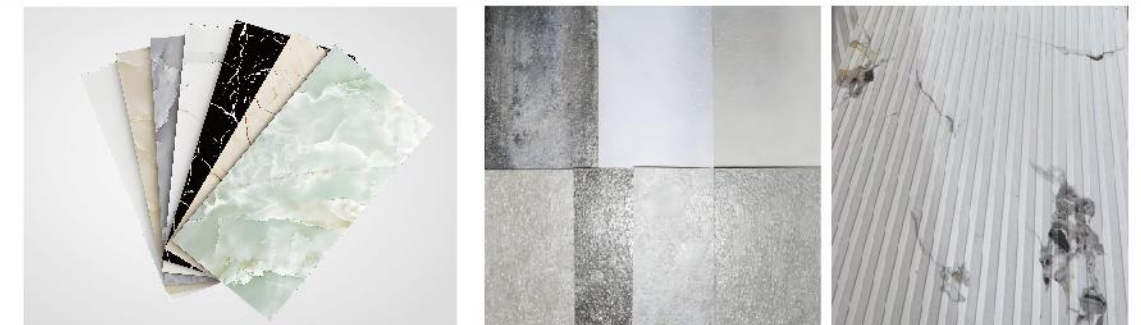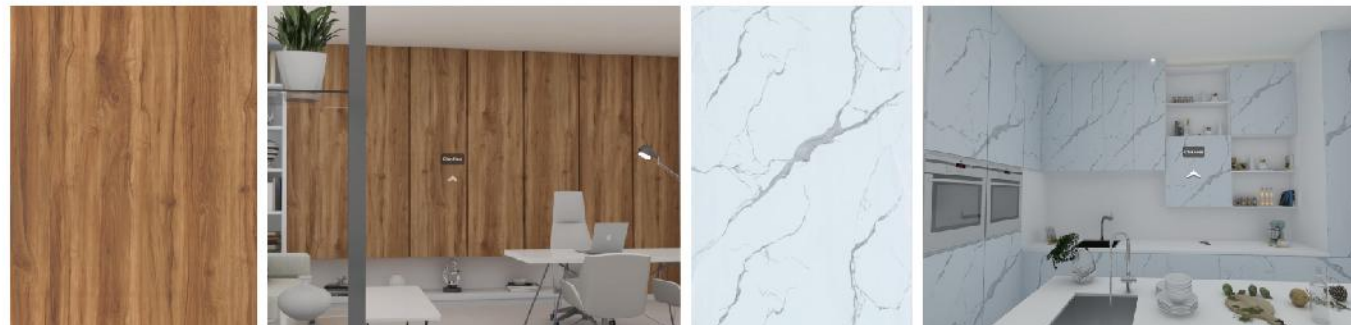

WPC地板生产线 WPC Flooring Production Line

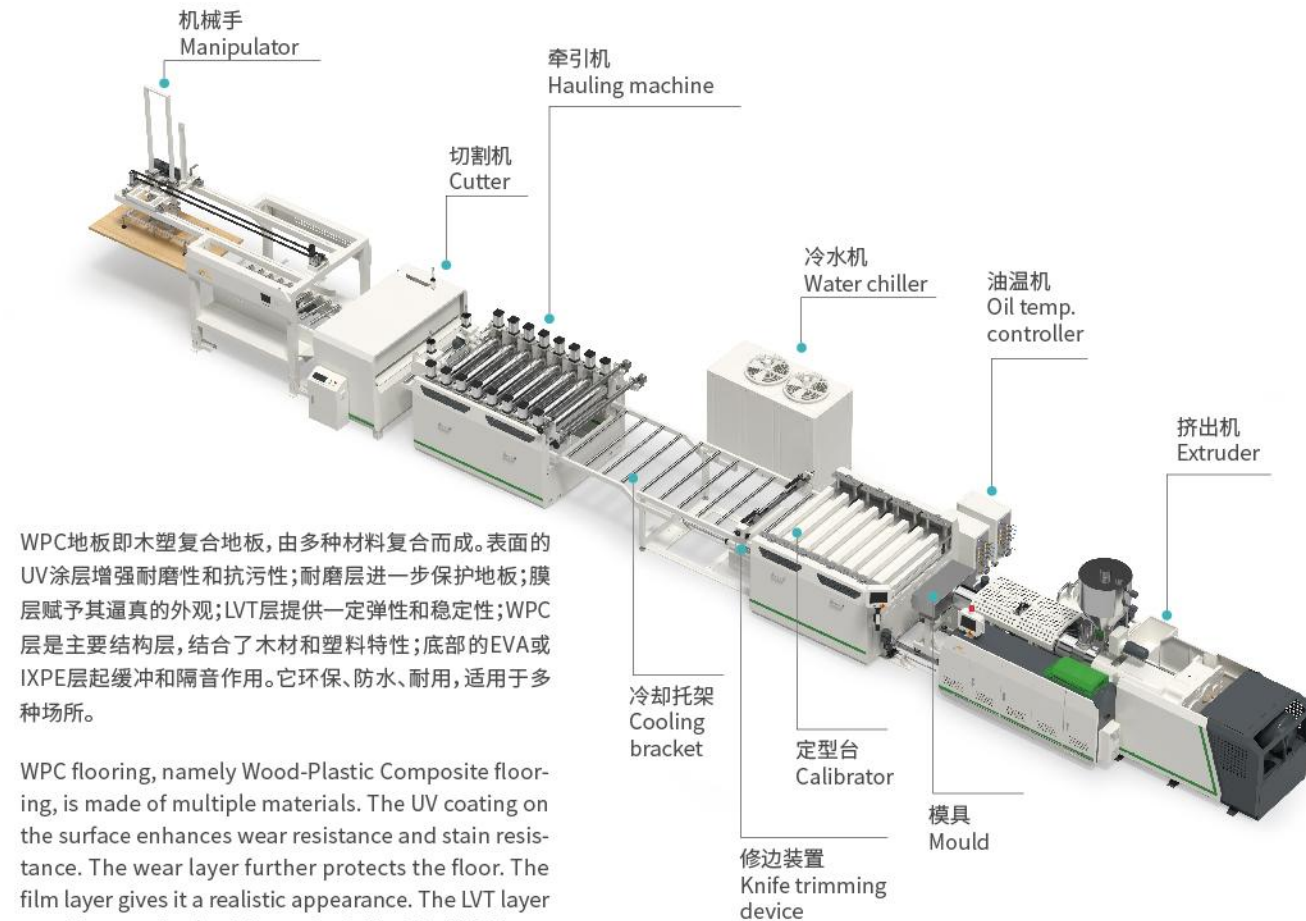

WPC地板即木塑复合地板，由多种材料复合而成。表面的UV涂层增强耐磨性和抗污性；耐磨层进一步保护地板；膜层赋予其逼真的外观；LVT层提供一定弹性和稳定性；WPC层是主要结构层，结合了木材和塑料特性；底部的EVA或IXPE层起缓冲和隔音作用。它环保、防水、耐用，适用于多种场所。


WPC flooring, namely Wood-Plastic Composite flooring, is made of multiple materials. The UV coating on the surface enhances wear resistance and stain resistance. The wear layer further protects the floor. The film layer gives it a realistic appearance. The LVT layer provides certain elasticity and stability. The WPC layer is the main structural layer, combining the characteristics of wood and plastic. The bottom EVA or IXPE layer serves as cushioning and sound insulation. It is environmentally friendly, waterproof, durable, and suitable for various places.



技术参数 Technical Parameters

设备参数 Model	92/188
制品厚度 Thickness (mm)	5-10
制品宽度 Width (mm)	1050/1350
主机功率 Extruder motor (kw)	110
产量 Capacity (Ton/24hrs)	10-12

PVC外墙挂板生产线 PVC Soffit Panel Production Line

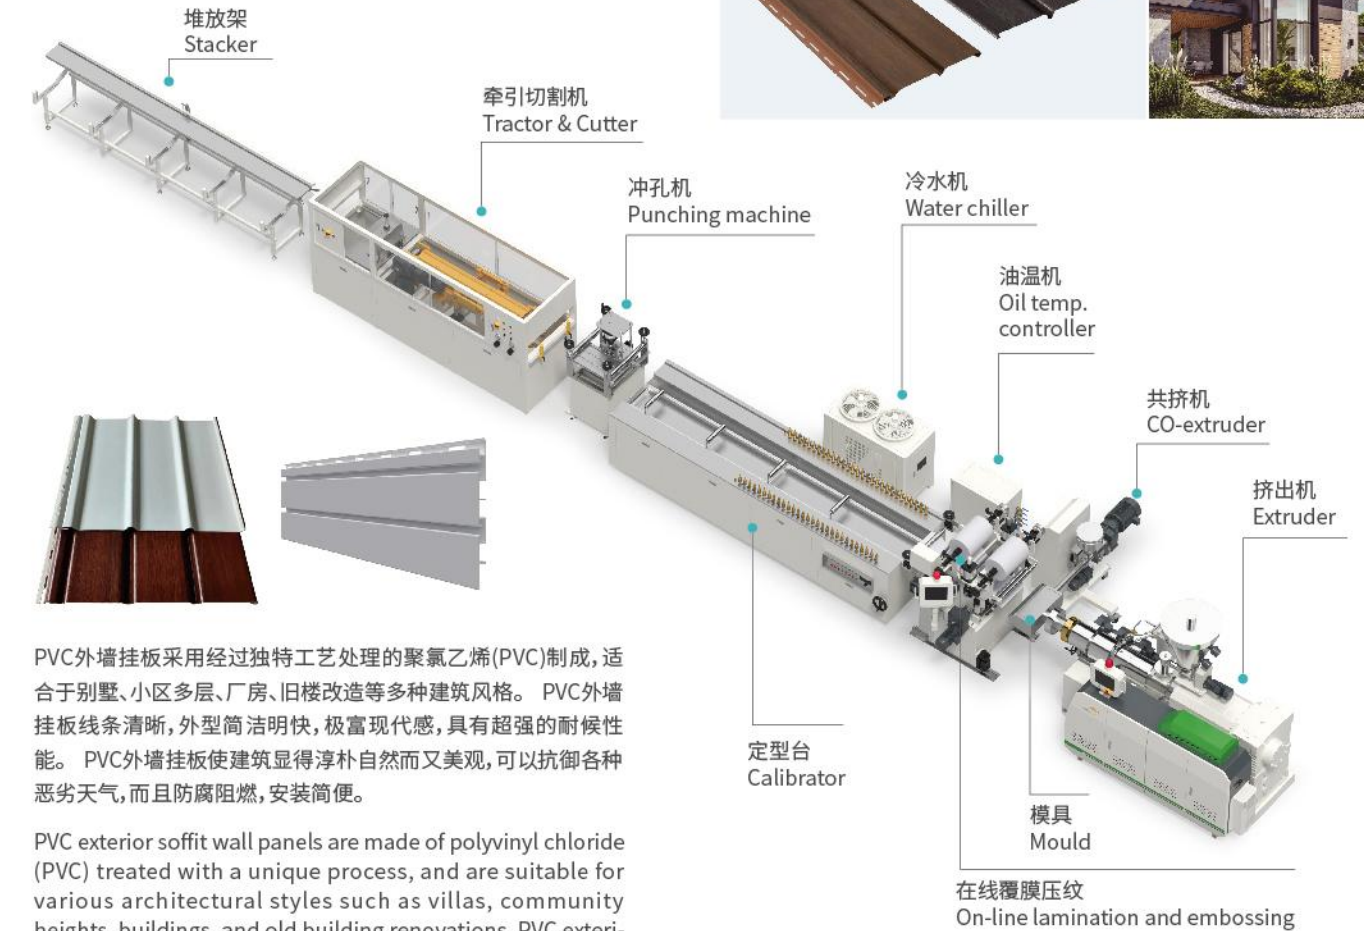

PVC外墙挂板采用经过独特工艺处理的聚氯乙烯(PVC)制成，适合于别墅、小区多层、厂房、旧楼改造等多种建筑风格。PVC外墙挂板线条清晰，外型简洁明快，极富现代感，具有超强的耐候性能。PVC外墙挂板使建筑显得淳朴自然而又美观，可以抗御各种恶劣天气，而且防腐阻燃，安装简便。

PVC exterior soffit wall panels are made of polyvinyl chloride (PVC) treated with a unique process, and are suitable for various architectural styles such as villas, community heights, buildings, and old building renovations. PVC exterior wall hanging boards have clear lines, simple and lively appearance, are very modern, and have super weather resistance.

PVC外墙挂板特点

1、装饰性

PVC外墙挂板外观采用仿木纹理设计，具有淳朴自然的美感，立体观感强，有多种不同的颜色及质感设计。多种颜色的挂板可以搭配使用，也可以配合其他品质外墙装饰材料。

2、经济实用性

相比较现在市场上的其他外墙材料而言，PVC外墙挂板可以说是物美价廉、经济实用的一种新型材料。

3、安装简易性

安装工艺比较简单，非常牢固可靠，施工的周期比较短，是目前为止非常省时省工的外墙装饰装修材料，并且还能减少很多的安装成本。

4、环保、节能性

PVC外墙挂板是绿色环保产品，材质为聚氯乙烯，不含石棉等有害物质；产品安装简便快捷，没有噪声污染；降低建筑物内的能耗，增加建筑物的保温隔热性能，强化建筑物的隔音功能，冬暖夏凉，有效的节约了能源。


The advantages of PVC soffits are as follows:

- PVC soffit panels are a universal solution – smooth panels may effectively imitate steel, whilst a soffit with wood texture bears a striking resemblance to real wood.
- PVC soffit panels are available in a variety of colours – they can be matched to the roof structures and facade of the building in various colours.
- PVC soffit panels are resistant to moisture.
- PVC soffit panels are resistant to mechanical damage, nontoxic and incombustible, profiled elements of PVC soffits are light, so they do not cause difficulties during assembly, many PVC soffit systems also include perforated panels to ensure adequate roof ventilation.
- PVC soffit does not require maintenance, renovation or painting,
- PVC soffit is relatively cheap.

技术参数 Technical Parameters

主机 Main Extruder	Conical Twin Screw Extruder 65/132
共挤机 Co-extruder	Single Screw extruder 45/30
制品宽度 Width (mm)	400
产能 Capacity (kg/h)	100-250

■ PVC/WPC 发泡板生产线 PVC/WPC Foam Board Production Line

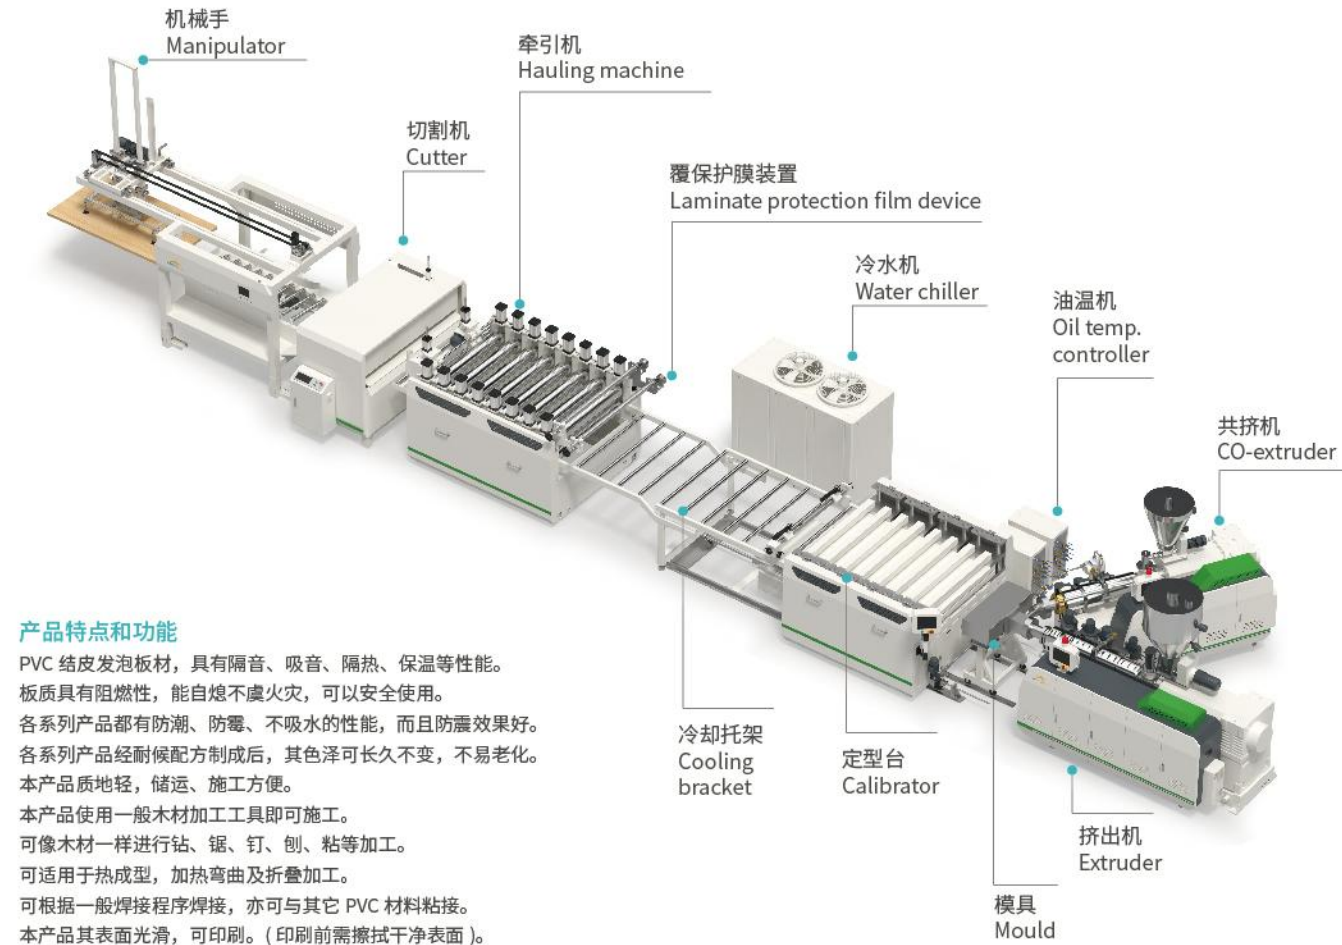

产品特点和功能

PVC 结皮发泡板材，具有隔音、吸音、隔热、保温等性能。板质具有阻燃性，能自熄不虞火灾，可以安全使用。各系列产品都有防潮、防霉、不吸水的性能，而且防震效果好。各系列产品经耐候配方制成后，其色泽可长久不变，不易老化。本产品质地轻，储运、施工方便。本产品使用一般木材加工工具即可施工。可像木材一样进行钻、锯、钉、刨、粘等加工。可适用于热成型，加热弯曲及折叠加工。可根据一般焊接程序焊接，亦可与其它 PVC 材料粘接。本产品其表面光滑，可印刷。(印刷前需擦拭干净表面)。

Characteristics and Functions of Products


PVC crust foamed plate has such characteristics as sound separation, sound absorption, heat separation, temperature-keeping, etc. The material is incombustible, it is safe for use. All series of products have property of moisture proof, mildew proof, water resistance, its vibration resistant effect is good. All series of products have property of weathering proof, its luster may remain forever, it is not easy to be ageing. This product is light, storage & transport, construction are rather convenient. This product can be worked with normal tools for wooden material. Drilling, sawing, nail, planing, bonding can be conducted like wooden material. It is suitable for thermal shaping, thermal bending and fold processing. It can be welded, it can also be bonded with other PVC material. The surface of this product is smooth, it can be printed. (Clean the surface before printing.)

技术参数 Technical Parameters

设备参数 Model	80/156	80/173	Co-extruder 65/132
制品厚度 Thickness (mm)	4~25, 25~45		
制品宽度 Width (mm)	1220, 1560, 1830, 2050		
主机功率 Extruder Motor (kw)	75	90	37
产量 Capacity (kg/h)	300-400	400-600	100-250



■ PVC 自由发泡片材生产线 PVC Free Foam Sheet Production Line

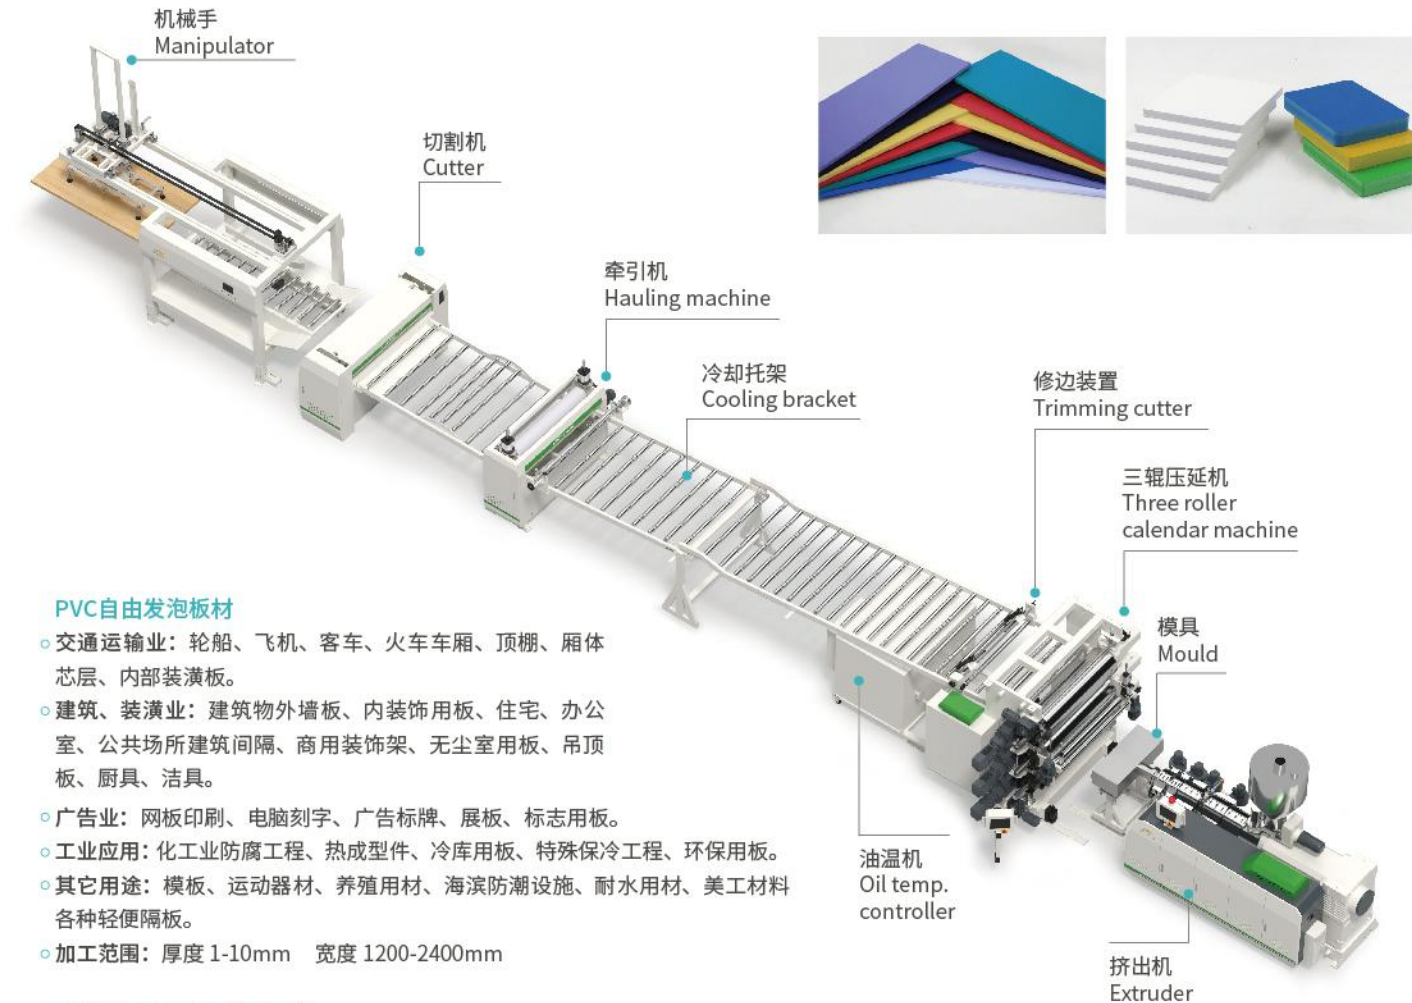

PVC自由发泡板材

- 交通运输业：轮船、飞机、客车、火车车厢、顶棚、厢体芯层、内部装潢板。
- 建筑、装潢业：建筑物外墙板、内装饰用板、住宅、办公室、公共场所建筑间隔、商用装饰架、无尘室用板、吊顶板、厨具、洁具。
- 广告业：网板印刷、电脑刻字、广告标牌、展板、标志用板。
- 工业应用：化工业防腐工程、热成型件、冷库用板、特殊保冷工程、环保用板。
- 其它用途：模板、运动器材、养殖用材、海滨防潮设施、耐水用材、美工材料各种轻便隔板。
- 加工范围：厚度 1-10mm 宽度 1200-2400mm


PVC Free Foamed Sheet

- Transportation: such as steamship, aeroplane, carriage, train compartment, roof shed, case core layer, inner upholstery, etc.
- Architecture: such as building wall board, decoration board, housing, office, public building interlayer, commercial decoration shelf, non-dust room board, ceiling plate, etc.
- Advertisement: such as screen printing, computer lettering, ad board, etc.
- Industry: such as chemical industry antisepticizing project, thermoforming, for refrigerator, for temperature keeping, for environment protection, etc.
- Other applications: such as mould plate, sports equipment, breeding equipment, seashore wet-proof facility, water-fast material, art material, various interlayer, etc.
- Production scope: thickness 1-10mm, width 1200-2400mm

技术参数 Technical Parameters

设备参数 Model	80/156	80/173
制品厚度 Thickness (mm)	1-10	
制品宽度 Width (mm)	1220, 1560, 1830, 2050	
主机功率 Extruder motor (kw)	75	90
产量 Capacity (kg/h)	200-300	300-400

■ 木塑门板生产线 PVC/WPC Door Board Production Line

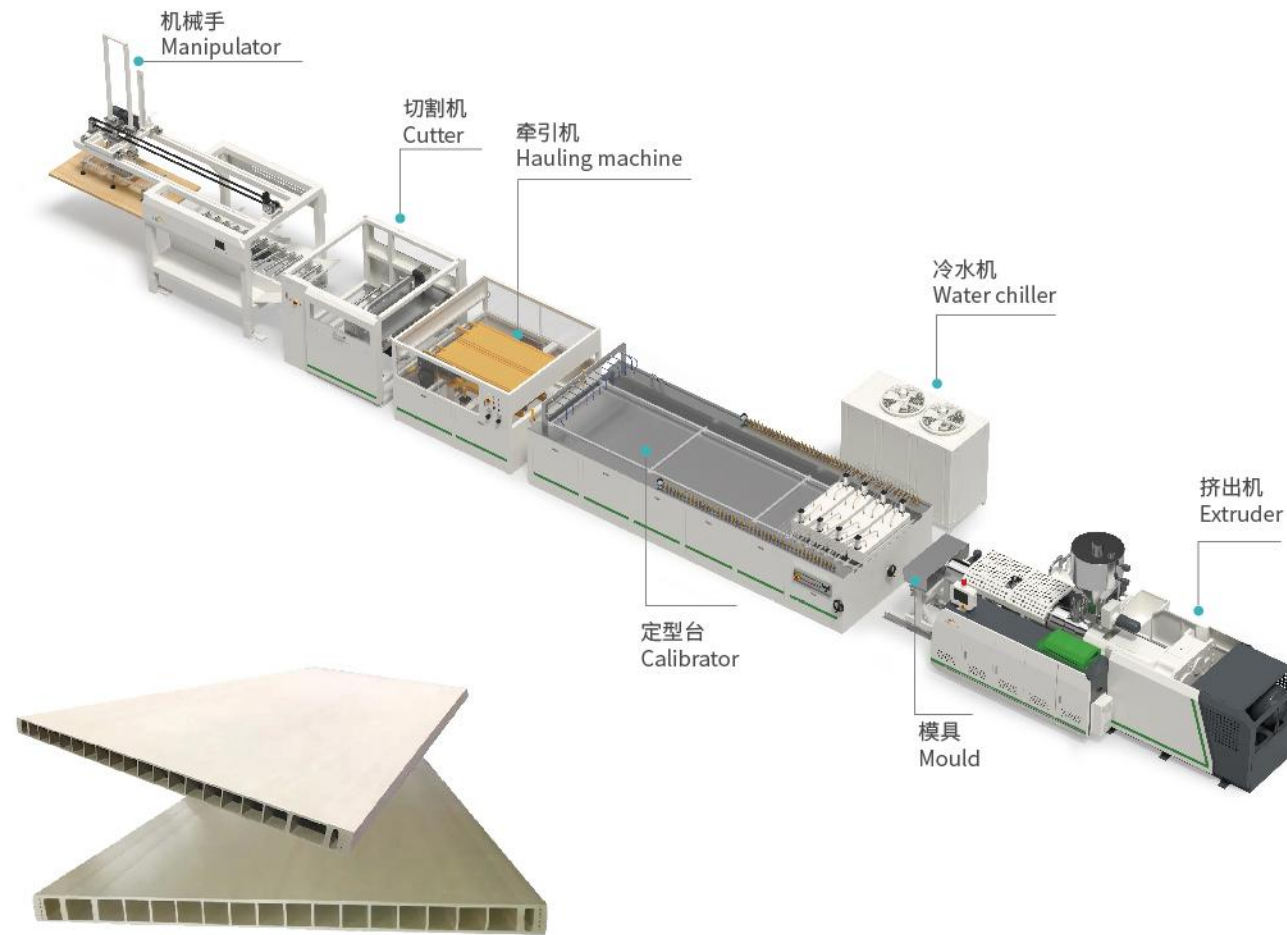

生产工艺流程 Production process




技术参数 Technical Parameters

设备参数 Model	80/156	92/188
制品厚度 Thickness (mm)	25-45	25-45
制品宽度 Width (mm)	800-1000	800-1000
主机功率 Extruder motor (kw)	75	110
产量 Capacity (kg/h)	300-400	500-600



■ 木塑门框生产线 PVC/WPC Door Frame Production Line

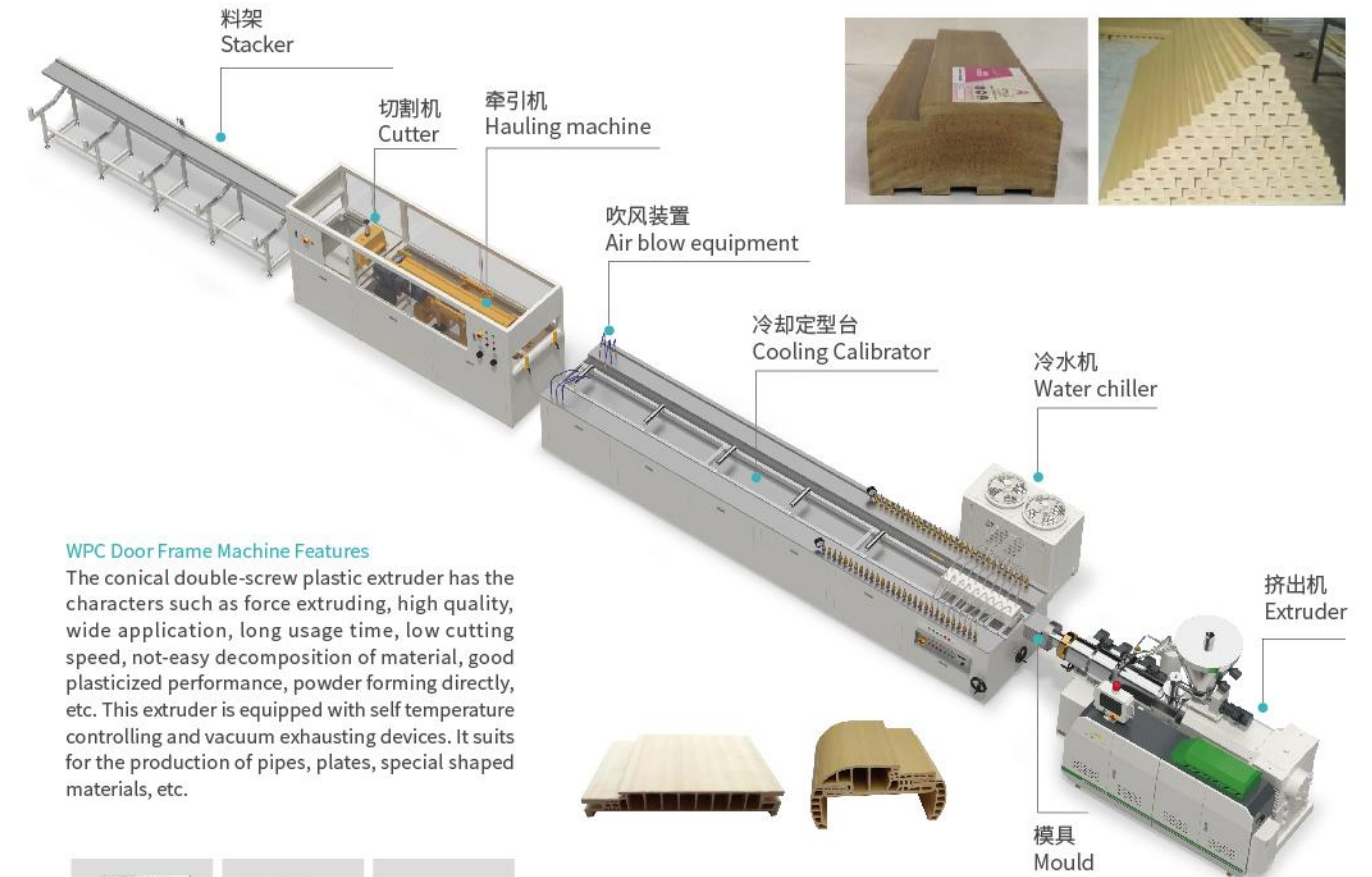

WPC Door Frame Machine Features

The conical double-screw plastic extruder has the characters such as force extruding, high quality, wide application, long usage time, low cutting speed, not-easy decomposition of material, good plasticized performance, powder forming directly, etc. This extruder is equipped with self temperature controlling and vacuum exhausting devices. It suits for the production of pipes, plates, special shaped materials, etc.



Advantages



生产流程 WPC Door Frame Making Process




技术参数 Technical Parameters


设备参数 Model	55/110	65/132
最大制品宽度 Max Width (mm)	240	240/300
主机功率 Extruder motor (kw)	22	37
产量 Capacity (kg/h)	80-120	150-250



■ 木塑PE/PP, WPC 型材生产流程 Production Flowchart of WPC PE/PP Profile

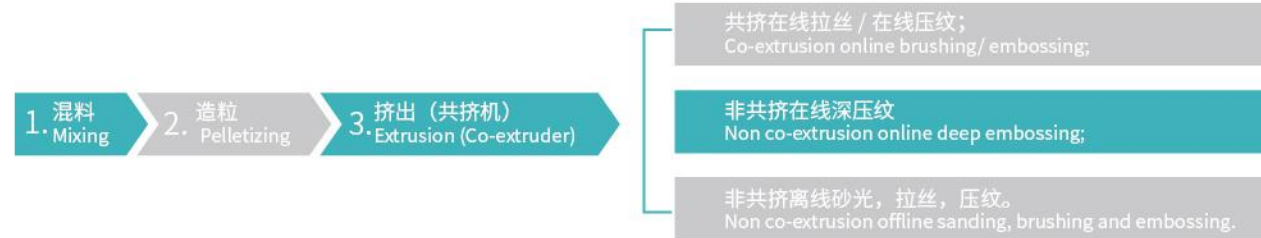

■ 木塑PE/PP, WPC平双造粒生产线 PE/PP WPC Parallel Twin-screw Pelletizing Production Line

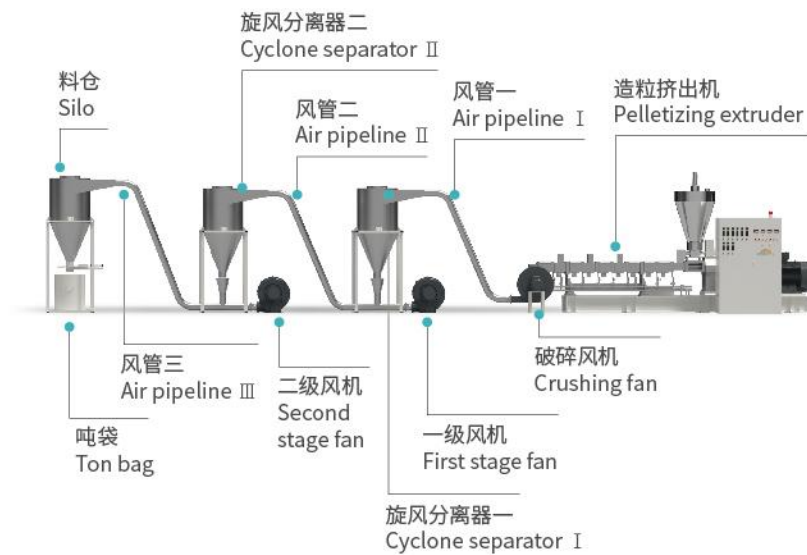

用途
造出的木塑 PE/PP 粒子，满足挤出需要。

生产线特点和优势

- 采用了破碎机破碎工艺方法生产木塑粒子，产量更大；
- 大长径比，混炼，塑化，分散，排气，除湿效果更好；
- 挤出主要元件筒体和螺杆为积木式结构，根据需要可自己选配长径比；
- 冷却送料方式为两级或三级风送；
- 电机电器元件均为国内国际优质品牌。



Application

The ready-made wood plastic PE/PP particles to meet the needs of the extrusion.


Features and advantages of production line

- Adopting crushing type pelletizer to get higher capacity;
- Large L/D ratio, good effect of mixing, plasticization, dispersion, exhaust and moisture-removing;
- Building block type screw and barrel of the extruder, according to the L/D by yourself;
- Cooling transporting mode is two grade fans or three grade fans;
- The motor and electrical components adopts domestic and international brands.

技术参数 Technical Parameters

设备参数 Model	65	75	75+
长径比 L/D ratio	36-40	36-40	52
主机功率 Extruder motor (kw)	75	110	280
产量 Capacity (kg/h)	150-250	400-600	1000-1200

■ 木塑PE/PP, WPC户外型材生产线 PE/PP WPC Outdoor Profile Production Line

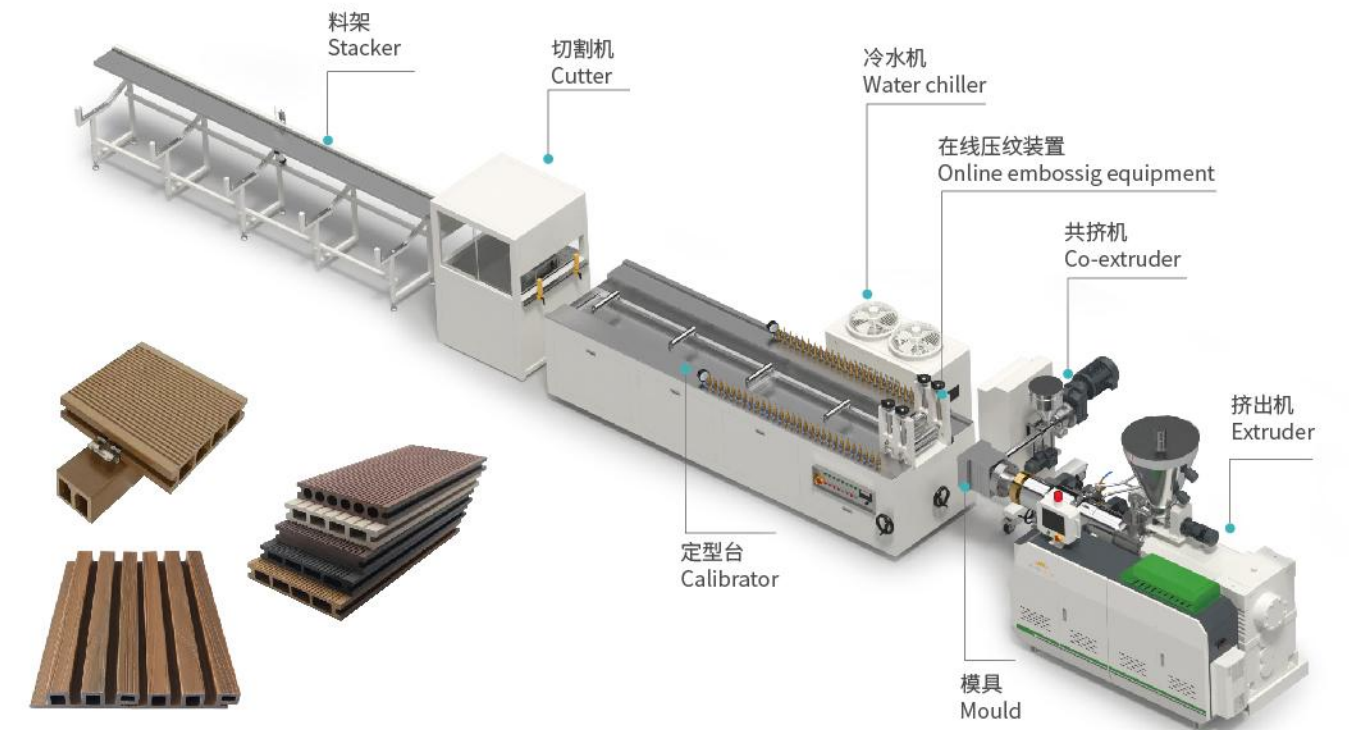

产品应用

室外园林景观，栅栏，凉亭，户外地板，格栅板，桑拿板，立柱等。

Product Application

Outdoor landscape, fence, pergola, decking, gratings, sauna board, poles, etc.

产品特点

木塑 PE/PP 型材是一款环保无污染，可回收再利用的户外产品，具有防水，防潮，阻燃，防腐蚀，耐气候，不褪色，寿命长等特点。此外，可像木材一样进行钻，锯，钉，刨等加工，快捷安装，深受广大客户喜爱。

Product Features

WPC PE/PP profile is an outdoor product that is environmentally friendly and non-polluting, which can be recycled for re-extrusion use, and which has the characteristics of water-proof, moisture-proof, flame-retardant, mould-proof, weather-resistance, non-fading, long life, etc. Also, it can be processed by drilling, sawing, nailing, plans and other processes like wood, which can be quickly installed and loved by customers.

技术参数 Technical Parameters

设备参数 Model	65/132	80/156
最大制品宽度 Max width (mm)	240	600
主机功率 Extruder motor (kw)	37	55
产量 Capacity (kg/h)	150-250	250-350

■ PVC/WPC型材生产线 PVC/WPC Profile Production Line



Characteristics and functions of the production line

PVC profile extrusion line is mainly used in PVC door & window profile, wide door board, window board, extrusion of multi-holes tube for passing through lines (four holes, six holes, seven holes, nine holes ... etc). For different sectional surface and die head, twin parallel (conical) screw extruder of different specifications can be chosen together with corresponding vacuum calibrating table, haul-off unit, cutting unit, tilter...etc.

Capacity of main frame can be optionally chosen from 60-700 Kg/h. The haul-off unit has applied unique lift technique our company. Stable work, good reliability and large pulling force. Vacuum setting has applied special enlarged vortex cooling system which is good for cooling and calibrating so as to meet demand of high speed extrusion. Movement speed and drawing speed of cutting machine keep synchronous. All movements are controlled by imported PLC, the design is reasonable, the operation is stable, also it can conduct automatic cutting with fixed length. Powder & dust suction device can be provided. With different die tooling, the tilter platform can choose such specifications as 4-meter, 6-meter, 8-meter, 11-meter...etc. conical twin screw extruder, it is particularly suitable for high speed extruding of profile material.

技术参数 Technical Parameters

主机型号 Extruder model	SJZ55/110	SJZ65/132		SJZ80/156		SJZ92/188
主电机功率 Extruder motor (kw)	22	37		55		110
辅机型号 down-stream equipment model	YF240S	YF240A	YF300A	YF600	YF900	YF1200
制品宽度 Product width(mm)	Max240	Max240	Max300	Max600	Max900	Max1200
牵引速度 haul-off speed	0-5	0-5	0-5	0-3	0-2.5	0-5
辅机功率 Down-stream equipment power	22	35	35	44	25	62
挤出量 Capacity (kg/h)	100	220	220	350	350	750

■ 塑料辅机 Plastic Auxiliary Machinery

SRL-W系列卧式混合机组 SRL-W Heating / Cooling Mixer

用途:

适用于塑料、橡胶、化工、食品等行业，粉、粒状物料的混合、着色和干燥。典型应用于PVC干混料的制备、塑料填充改性、挤出机造粒前的初混、木塑生产前的多组分混合等。

Application:

Suitable for plastics, rubber, chemical and food industry, for powder or granulate material blending, coloring and drying. Typical application includes: Production of PVC dry blend, filling and modification of plastics, pre-mixing of compounding process and premix of Wood-Plastic Composites.



塑料破碎机 Plastic Crusher



用途及特点:

- 本系列破碎机经过我厂多年的研究与技术改进，性能已经得到全面完善，可解决几乎所有塑料破碎方面的难题。
- 该机型外壳都采用牢固的焊接钢结构，具有广泛的通用性，同时该机型中加入的可拆卸偏转楔可满足最苛刻的要求。
- 该机型可破碎注模过程中生产中的废品，也可破碎浇口、管材、型材、片材、薄膜及大块的水口料。
- 该机型具备经济、耐用、易清洁、使用寿命长等特点；同时还提供一系列配套的辅助设备，如鼓风机、抽吸机组、输送带等。

Application & Features:

- After many years of research and technical improvement, the performance of this series crusher has been fully improved, which can solve almost all the problems of plastic crushing.
- The shell of the machine is made of welded steel structure, which has a wide range of versatility, and the addition of the removable wedge can meet the most demanding requirements.
- The model can be broken in the process of injection mold production waste, but also broken gate, pipes, profiles, sheets, films and bulk materials.
- The model has the characteristics of economy, durability, easy cleaning, long service life, etc., and can also provide a series of auxiliary equipment, such as blower, suction unit, conveyor belt and so on.

塑料辅机 Plastic Auxiliary Machinery

MF系列立式高速磨粉机 Plastic Milling Machine



MF新型立式磨盘磨粉机磨盘直径最小为350mm,最大为800mm,属于磨盘式磨粉机系列。广泛应用于硬度适中、耐冲击及易碎的物料,如PE、PVC、PP、ABS、PA、EVA、PET、PS、PPS、EPS、PC、泡沫、牛皮等等。

The brand-new MF series plastic pulverizer belongs to the Disc-type pulverizer series, which disc diameter from 350mm to 800mm. This pulverizer is high speed, precision grinders for the processing of medium hard, impact resistant and friable materials, for example PE、PVC、PP、ABS、PA、PET、PS、PPS、EPS、PC、Foam、Cow leather and so on.

用途:

MF系列磨粉机最主要应用于塑料行业的粉体加工,为生产线提供粉料,通常配套使用振动筛以确保研磨粉料的细度精确。

Application:

MF series plastic pulverizer is the pulverization of Plastics industry applications. In this process, a screening machine is necessary to ensure the right output size.

冷水机 Chiller

- 精选进口部件配置,电器采用施耐德,采用PLC电脑控制,保证机器工作稳定,寿命长久。
- 采用不锈钢循环水箱,配置大流量,高扬程进口水泵,美国原装压缩机,并设有旁路阀,工作效率高,噪音少,冷却运转稳定,节省能源。
- 风冷式冷水机适用于杂质尘埃多的环境。
- 风冷式冷水机最适用于水质差的区域,可以节省冷水塔及其配管。
- 采用大容量的蒸发器,炎夏也能轻松运转。
- It has applied imported parts of famous brand. It has applied original electrical products such as Mitsubishi, Omron brands of Japan so as to guarantee stable operation of the machine with long life.
- It has applied stainless steel recycling water container with large flow and high lift imported water pump, compressor is imported from USA, side adjustment valve is arranged, the work efficiency is high, the noise is low. Cooling operation is stable, it is power saving.
- Air - cooled chiller is suitable for impurities and dust environment.
- The cold type water tower of breeze be applicable toes the fluid matter the district that short mosts. Can save the cold tower and tube.
- Evaporation hot summer that big capacity of adoption also can revolve from such as.



帝翔项目案例 Kingshine Project Cases

